



819 N. Highland Ave.  
Los Angeles, CA 90038

Tel: (323) 465-2131, Fax: (323) 465-3504  
Visit us on the web at [www.calrad.com](http://www.calrad.com)



# 28-161-T Solderless VGA Decora Insert

## Hookup Instructions

Tools required for connection, wire strippers, 2mm slotted screw driver. 1.) Strip and prepare Overall Jacket. 2.) Strip and prepare each coax cable. Each shield and center conductor lead lengths must be at least .15" long and parallel to each other to properly insert into the terminal block, see Diagram 1B. Follow the Terminal ID for proper wiring of the cable to the connector, see diagram 1A. **Optional**, Use the supplied telco jellybeans to connect the over all shield to the two black ground cables, this is not necessary if your cable does not have a overall shield. 2 x 3/8" holes are provided for audio, video feedthru connectors if necessary. When finished use the cable tie to secure the cable to the connector.



Optional Ground Connector Telco Jelly Beans

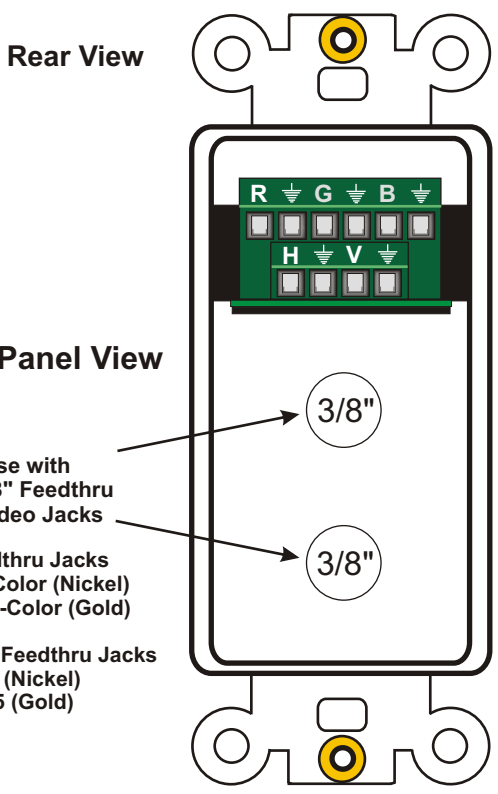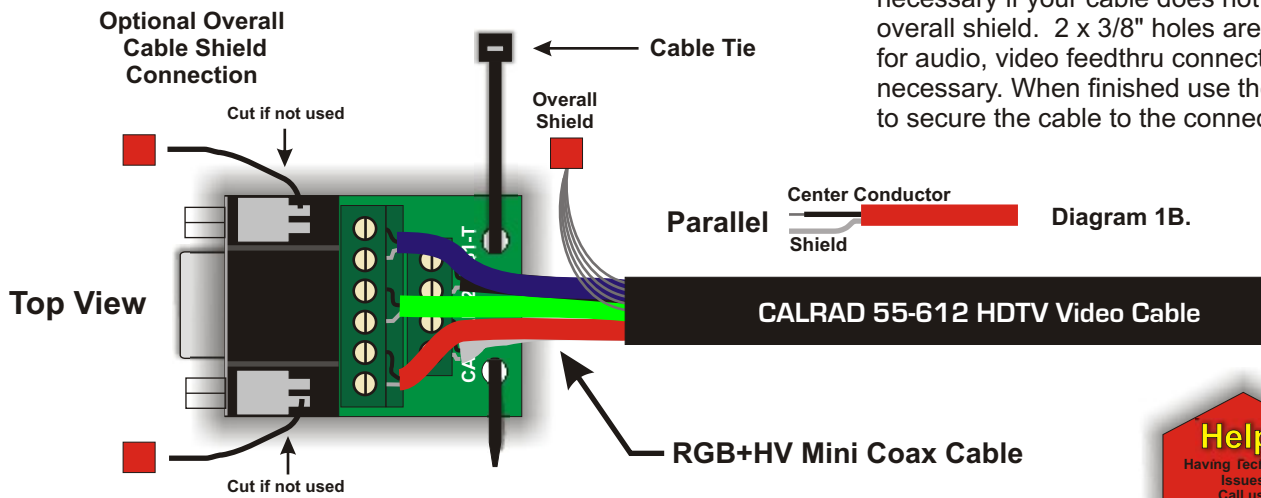

For use with Calrad 3/8" Feedthru Audio Video Jacks

RCA Feedthru Jacks  
30-410-3/8-Color (Nickel)  
30-410G-3/8-Color (Gold)

3.5mm Stereo Feedthru Jacks  
30-295 (Nickel)  
30-295 (Gold)

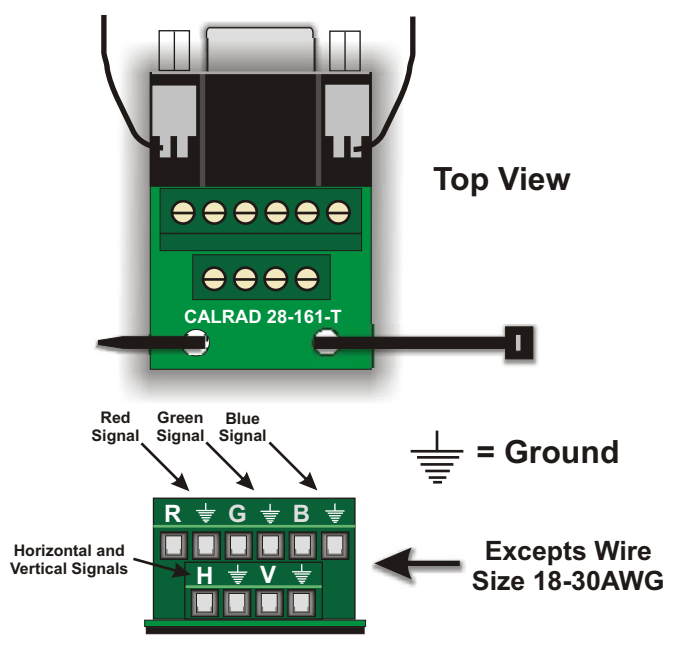


Diagram 1A. Terminal Hookup