
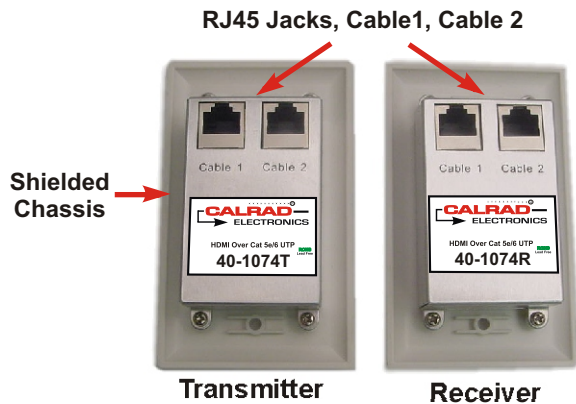


CALRAD
ELECTRONICS

819 N. Highland Ave.
Los Angeles, CA 90038


Tel (323) 465-2131, Fax (323) 465-3504
Visit us on the web at www.calrad.com

Part No. 40-1074
Active Wallplate Balun,
HDMI over 2 Cat5e/Cat6 Cables

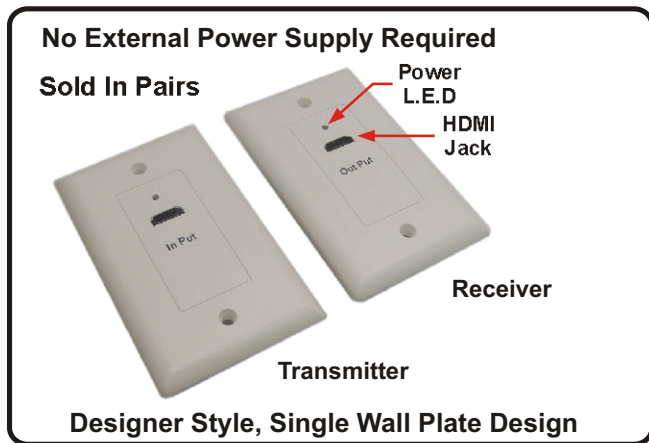


Rear View

568B Wire Start to Finish 568B

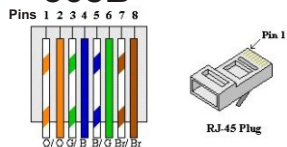

Connector Wiring Diagram

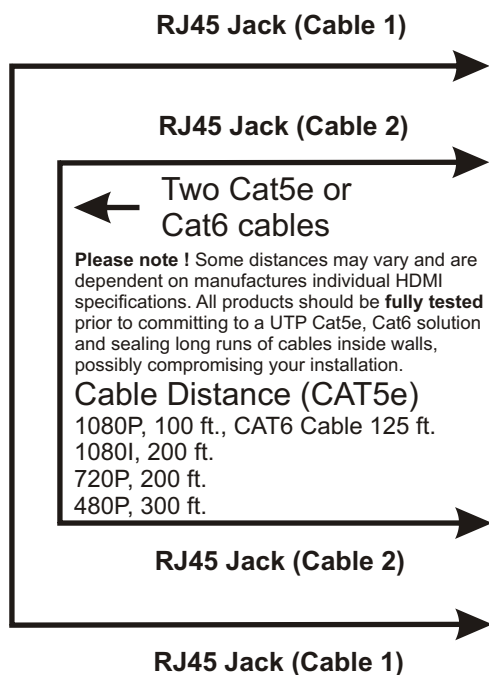

Please note ! Some distances may vary and are dependent on manufactures individual HDMI specifications. All products should be **fully tested** prior to committing to a UTP Cat5e, Cat6 solution and sealing long runs of cables inside walls, possibly compromising your installation.

Cable Distance (CAT5e)
1080P, 100 ft., CAT6 Cable 125 ft.
1080I, 200 ft.
720P, 200 ft.
480P, 300 ft.

Transmitter



HDMI-Input



Up to 6 Ft. HDMI Cable Max

Receiver



HDMI-Output



Up to 6 Ft. HDMI Cable Max



Satellite, STB,
Media PC, Bluray



Plasma, LCD Monitor,
DLP Projector



Specifications:

HDTV Resolutions: 480P, 720P, 1080I, 1080P (Max 10.2Gbps, HDMI 1.3b)
HDMI In/Out Connectors: 19 pin Female Jacks, 2 x RJ45 Shielded Jacks each unit.
Operating Temperature: 0-70 degrees C
Housing: Plastic, White Color
Weight: .15 lbs. ea.
Dimensions: Transmitter / Receiver: L-4.5" x W-2.75" x D-1.25"