



819 N. Highland Ave.
Los Angeles, CA 90038
Tel 323-465-2131
Fax 323-465-3504
www.calrad.com

New Products February 2006



30-601S-BK (Black)
30-601S-RD (Red)
Push Button Banana / Binding Post

Gold Solderless Speaker cable connectors. Works with 22-14 AWG speaker cable. Mounts in 3/8" hole. Wall plate not included shown for illustration purposes only.



72-259
RJ45 Male to USB Female type 'A'

Plastic adapter. Use USB cables to make Cat5 network cables or to run USB over CAT5 wiring, up to 50 ft.. Use Calrad 72-109 couplers or other adapters to connect as needed.

Connector Snaps In here



30-514
Plastic Female XLR to 1/2" connector Adapter


Use's any Calrad 1/2" chassis mount connectors. Insert it into the 30-514 adapter that provides ground isolated conversion to a female XLR cutout, 15/16". Black color. Cut out for label ID. Connectors not included.

Kit Includes 3 Pieces Shown



35-730
6db Component Video Attenuators

For use with displays that will not activate the component video port if the video level is higher than .7-1Vpp. Provides proper video attenuation for large distributed video applications. Male - Female inline Gold plated connectors with Individually color coded inserts for easy identification.

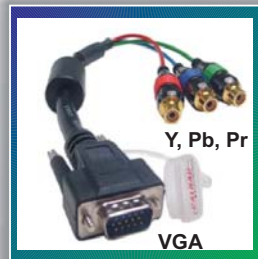

35-719
6 Inch HD-DB15 to Component Video Adapter Cable

HD-DB15 Male plug to Green, Blue, Red female RCA jacks. This device is not a signal converter and is only for connector type conversion only.



35-720
6 Inch M1DA to Component Video Adapter Cable

Interface M1DA type products with Analog component video signals. Gold plated connectors. This device is not a Analog to Digital signal converter and is only for connector type conversion only.



35-722
6 Inch M1DA to HDDB15 Video Adapter

M1DA Male plug to HD-DB15 jack. Provides VGA signals to work on a port that uses the M1DA connector. Gold plated connectors. This device is not a Analog to Digital signal converter and is only for connector type conversion only. Analog video is wired across the adapter.




55-782RT-12-SHG
55-782RT-25-SHG
Shielded IEC, 3 Prong Plasma, LCD, DLP White Power Cable

UL Approved 18AWG white color right angle 3 prong male AC plug to IEC female inline jack. Available in 12 ft., 25 ft. . PVC Jacket. Rated at 105 degree's Celsius.



35-721
6 Inch DB9 Male to 9 Pin Mini-Din Male Sharp Serial interface Cable

Used with Sharp DLP projectors. This serial adapter provides conversion of a chassis mount din jack to a 9 pin male RS232 communications jack which will allow other RS232 protocol equipment to communicate with the projector. Sharps OEM part numbers AN-A1RS or qcnwga015wpz. Includes 30-582 F-F gender changer.

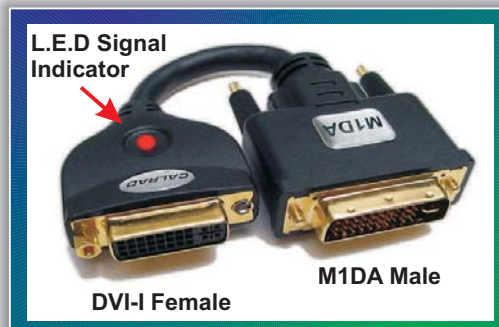

35-717
6 Inch M1DA to DVI-I Video Adapter

M1DA Male plug to DVI-I jack Provides connector conversion for digital and analog signals to work on a port that uses the M1DA connector. Gold plated connectors. This device is not a Analog to Digital signal converter and is only for connector type conversion only. Both Analog and Digital signals are wired across the adapter. L.E.D signal indicator illuminates when a digital signal is present.